



Technical Specifications

Model No.	MEDXP-400-EX2BCH
Protection	Over Charge/Discharge/Current/Temperature
Max Power	200W Max
Charging Time	< 4.5 Hours
Output	28V 7.1Ah 200W
Operating Temperature	10 to 35 ° C
Storage Temperature	-20 to 35°C
State of Charge Indicator	3 LED Light Indicators Per Bay
Input Voltage	100-240V 50/60 Hz
Warranty *	3 Yr
Weight	3 lbs (Base) 3.4lbs (Wall mounted)
Dimension W x L x H	14.8" x 3.2"(5.6") x 3.1"
Country of Origin	Rep of Korea
Use Power Supply	NAC-400E 60601-1 Adapter**
Included	Desktop Stand Feet, Wall Mount Kit***
Noise Level	0 dB

Features & Benefits

The Dual Battery Charger charges 2 MedXP400 auxiliary batteries simultaneously. This charging unit provides fully charged hot-swappable batteries so that users can maintain 100% up time on any equipment utilizing the MedXP 400 system for power

- Light Weight and Small Form Factor
- Reduced Footprint on Desk or Wall Space
- Intuitive Light Indicators
- Easy installation & turn-key setup
- Low power consumption
- Zero Noise Emission



* See Warranty Policy

Certifications & Regulatory

2002/95/EC RoHS	FCC EMC (Part 15B)
EN 61000-6-2:2005	CE EU EMC (EN61000-6-2/4)
HTS Code:	8504.40.0000

** Note: Does not include power supply. Use NAC-400E power supply included in the MedXP400 system.

*** Note: Does not include the wall mounting screws for wall mount plate (M8)

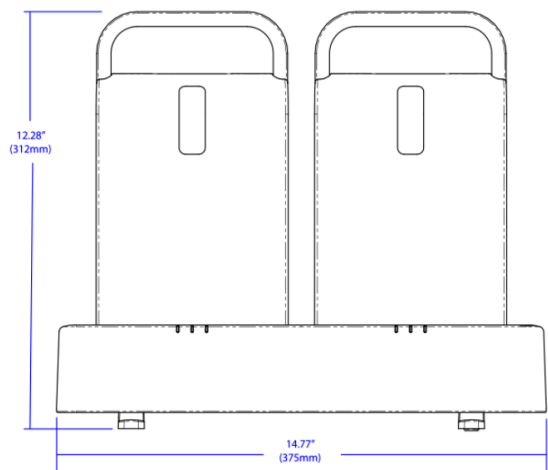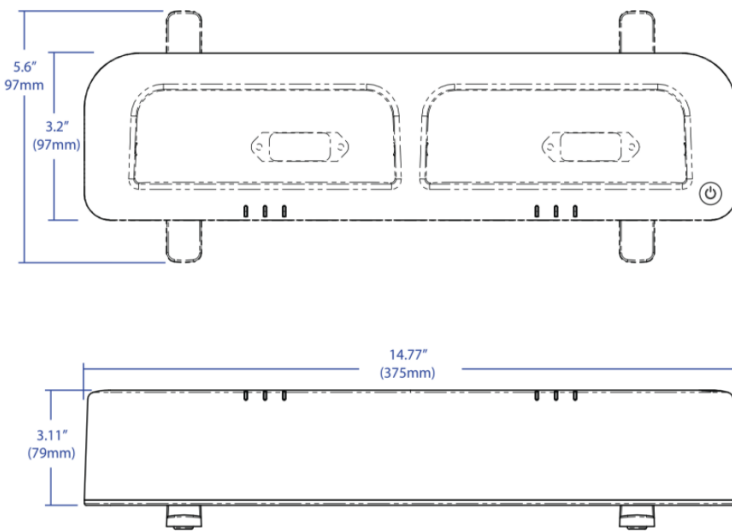

MedXP 400 by Amstron

Valencia CA | +1 818-504-1634 | medxp@amstron.com

2022 Copyright Amstron Corp. | www.amstron.com | All information is subject to change without notice

The information contained herein is for reference only and does not constitute a warranty of performance. Jan 10, 2022 Ver. 1a